

**CS 2750 Machine Learning
Lecture 13**

**Multiclass classification
Decision trees**

Milos Hauskrecht
milos@cs.pitt.edu
5329 Sennott Square

CS 2750 Machine Learning

Midterm exam

Midterm Tuesday, March 4, 2014

- **In-class (75 minutes)**
- **closed book**
- **material covered by February 27, 2014**

CS 2750 Machine Learning

Project proposals

Due: Thursday, March 20, 2014

- 1 page long

Proposal

- **Written proposal:**
 1. Outline of a learning problem, type of data you have available. Why is the problem important?
 2. Learning methods you plan to try and implement for the problem. References to previous work.
 3. How do you plan to test, compare learning approaches
 4. Schedule of work (approximate timeline of work)

CS 2750 Machine Learning

Project proposals

Where to find the data:

- From your research
- UC Irvine data repository
- Various text document repositories
- I have some bioinformatics data I can share but other data can be found on the NIH or various university web sites (e.g. microarray data, proteomic data)
- Synthetic data that are generated to demonstrate your algorithm works

CS 2750 Machine Learning

Project proposals

Problems to address:

- Get the ideas for the project by browsing the web
- It is tempting to go with simple classification but definitely try to add some complexity to your investigations
- Multiple, not just one method, try some more advanced methods, say those that combine multiple classifiers to learn a model (ensemble methods) or try to modify the existing methods

CS 2750 Machine Learning

Project proposals

Interesting problems to consider:

- Advanced methods for learning multi-class problems
- Learning the parameters and structure of Bayesian Belief networks
- Clustering of data – how to group examples
- Dimensionality reduction/feature selection – how to deal with a large number of inputs
- Learning how to act – Reinforcement learning
- Anomaly detection – how to identify outliers in data

CS 2750 Machine Learning

Multiclass classification

- **Binary classification** $Y = \{0,1\}$
- **Multiclass classification**
 - **K classes** $Y = \{0,1,\dots, K-1\}$
 - **Goal:** learn to classify correctly K classes
 - Or learn $f : X \rightarrow \{0,1,\dots, K-1\}$

- **Errors:**

- **Zero-one (misclassification) error for an example:**

$$Error_1(\mathbf{x}_i, y_i) = \begin{cases} 1 & f(\mathbf{x}_i, \mathbf{w}) \neq y_i \\ 0 & f(\mathbf{x}_i, \mathbf{w}) = y_i \end{cases}$$

- **Mean misclassification error (for a dataset):**

$$\frac{1}{n} \sum_{i=1}^n Error_1(\mathbf{x}_i, y_i)$$

CS 2750 Machine Learning

Multiclass classification

Approaches:

- **Generative model approach**
 - Generative model of the distribution $p(\mathbf{x},y)$
 - Learns the parameters of the model through density estimation techniques
 - Discriminant functions are based on the model
 - “Indirect” learning of a classifier
- **Discriminative approach**
 - Parametric discriminant functions
 - Learns discriminant functions **directly**
 - A logistic regression model.

CS 2750 Machine Learning

Generative model approach

Indirect:

1. Represent and learn the distribution $p(\mathbf{x}, y)$
2. Define and use probabilistic discriminant functions

$$g_i(\mathbf{x}) = \log p(y = i | \mathbf{x})$$

Model $p(\mathbf{x}, y) = p(\mathbf{x} | y)p(y)$

- $p(\mathbf{x} | y) =$ **Class-conditional distributions (densities)**


k class-conditional distributions

$$p(\mathbf{x} | y = i) \quad \forall i \quad 0 \leq i \leq K - 1$$

- $p(y) =$ **Priors on classes**


- - probability of class y

$$\sum_{i=1}^{K-1} p(y = i) = 1$$




CS 2750 Machine Learning

Multi-way classification. Example

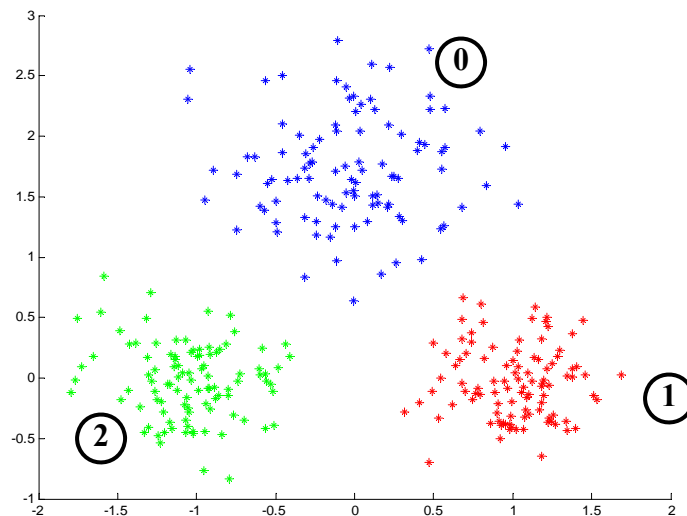

CS 2750 Machine Learning

Multiclass classification

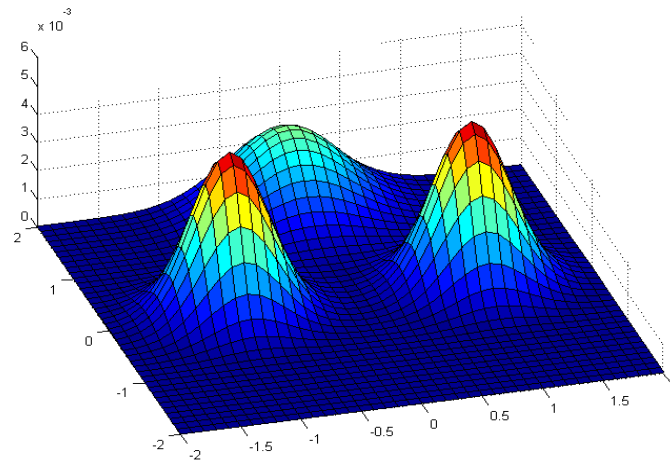

CS 2750 Machine Learning

Making class decision

Discriminant functions can be based on:

- **Likelihood of data** – choose the class (Gaussian) that explains the input data (\mathbf{x}) better (likelihood of the data)

Choice:
$$i = \arg \max_{i=0, \dots, k-1} p(\mathbf{x} | \boldsymbol{\theta}_i)$$

$$p(\mathbf{x} | \boldsymbol{\theta}_i) \approx p(\mathbf{x} | \mu_i, \Sigma_i) \quad \text{For Gaussians}$$

- **Posterior of a class** – choose the class with higher posterior probability

Choice:
$$i = \arg \max_{i=0, \dots, k-1} p(y = i | \mathbf{x}, \boldsymbol{\theta}_i)$$

$$p(y = i | \mathbf{x}) = \frac{p(\mathbf{x} | \boldsymbol{\theta}_i) p(y = i)}{\sum_{j=0}^{k-1} p(\mathbf{x} | \boldsymbol{\theta}_j) p(y = j)}$$

CS 2750 Machine Learning


Discriminative approach

- **Parametric model** of discriminant functions
- Learns the discriminant functions directly

How to learn to classify multiple classes, say 0,1,2?


Approach 1:

- A binary logistic regression on every class versus the rest (OvR)

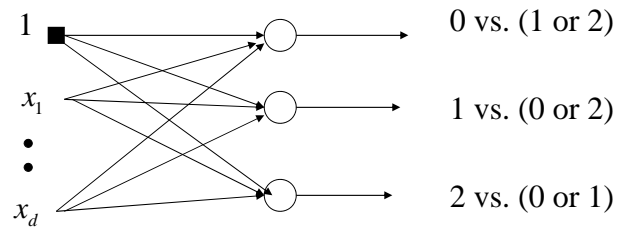


CS 2750 Machine Learning

Multiclass classification. Example

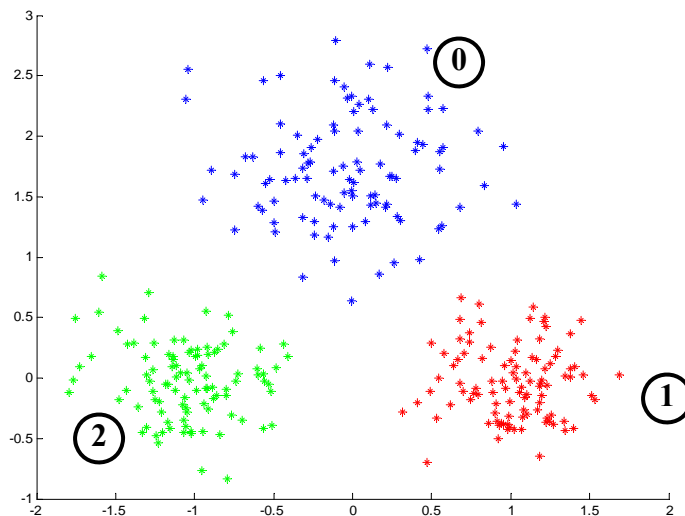


CS 2750 Machine Learning

Multiclass classification. Approach 1.

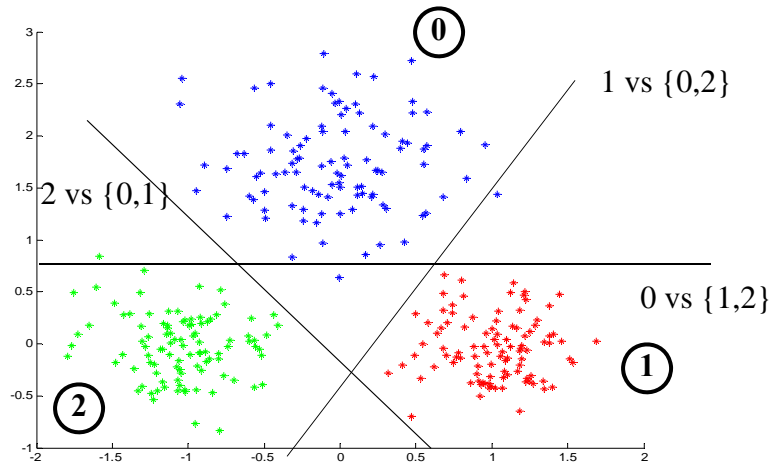


CS 2750 Machine Learning

Multiclass classification. Approach 1.

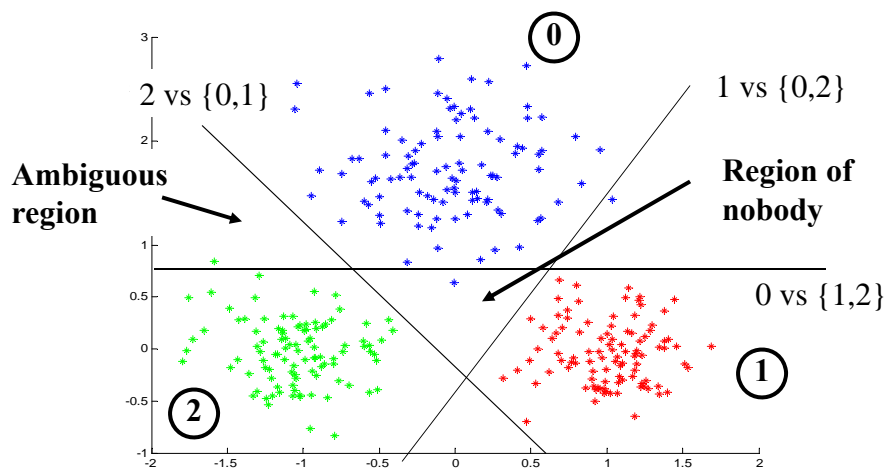

CS 2750 Machine Learning

Multiclass classification. Approach 1.

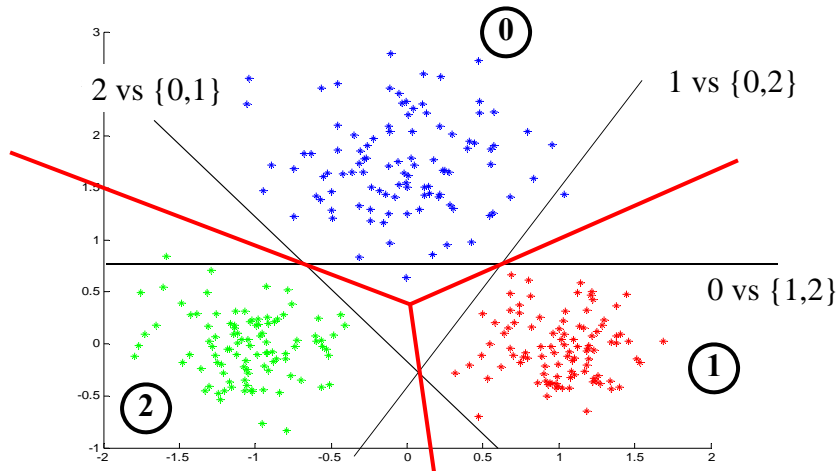


CS 2750 Machine Learning

Discriminative approach.

How to learn to classify multiple classes, say 0,1,2 ?


Approach 2:

- A binary logistic regression on all pairs

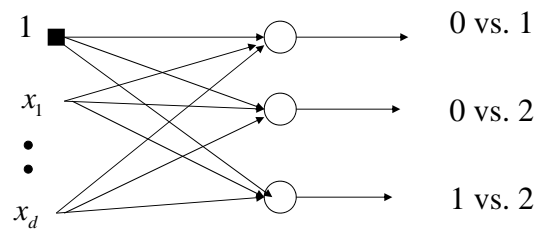


CS 2750 Machine Learning

Multiclass classification. Example

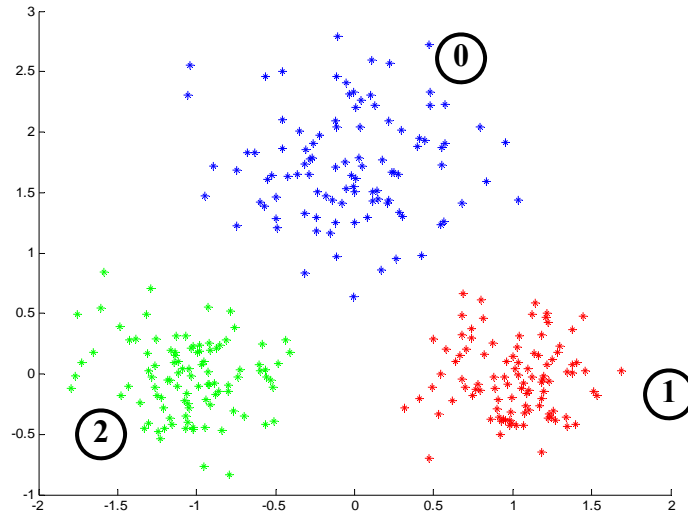


CS 2750 Machine Learning

Multiclass classification. Approach 2

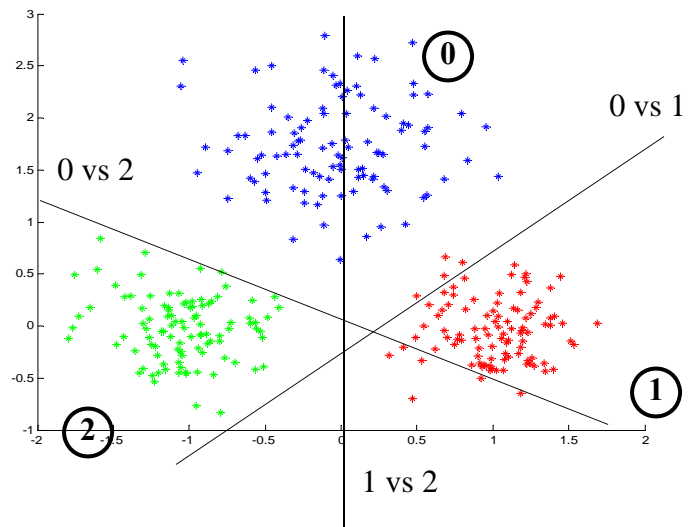


CS 2750 Machine Learning

Multiclass classification. Approach 2

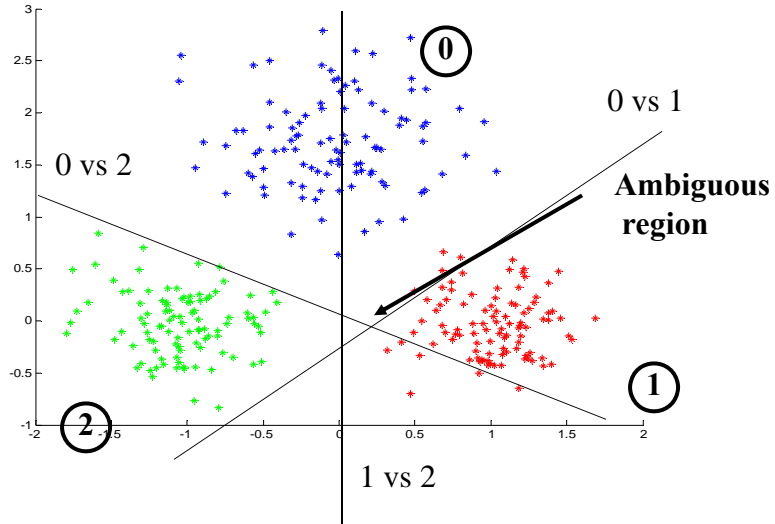

CS 2750 Machine Learning


Multiclass classification. Approach 2

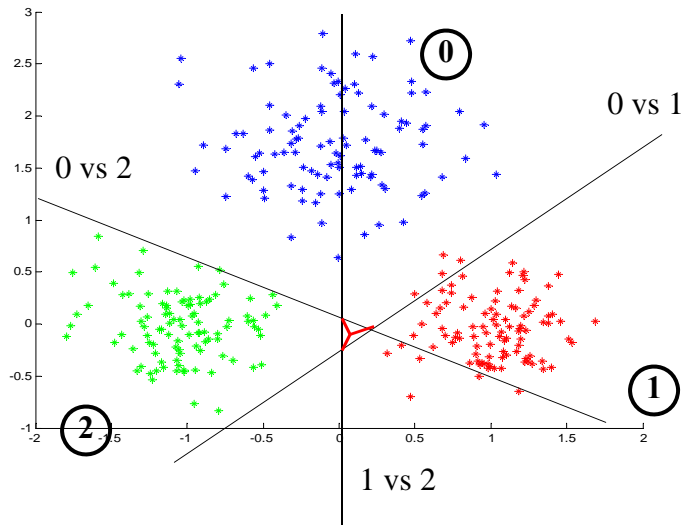

CS 2750 Machine Learning

Multiclass classification with softmax


- A solution to the problem of having an ambiguous region

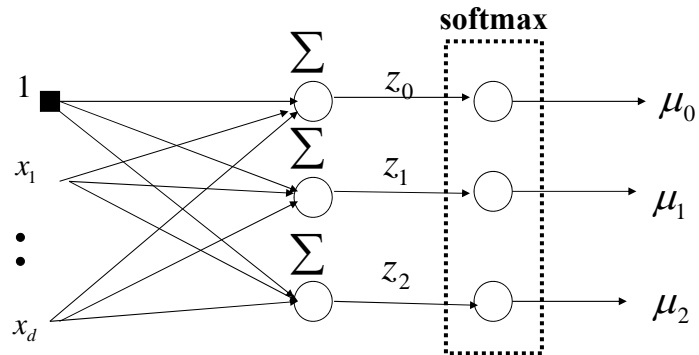

$$p(y = i | \mathbf{x}) = \mu_i = \frac{\exp(\mathbf{w}_i^T \mathbf{x})}{\sum_j \exp(\mathbf{w}_j^T \mathbf{x})} \quad \sum_i \mu_i = 1$$

CS 2750 Machine Learning


Multiclass classification with softmax

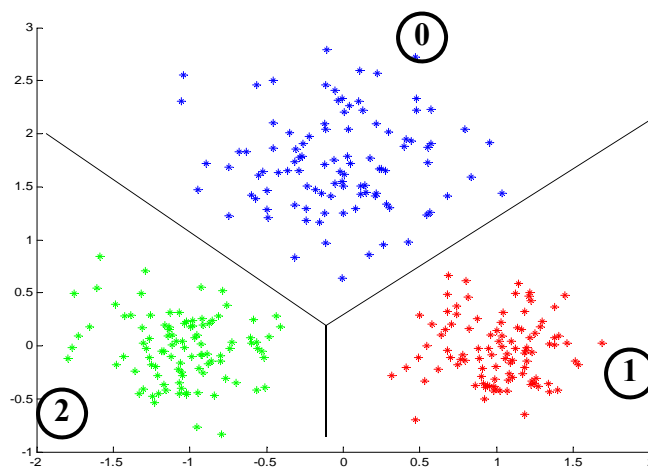

CS 2750 Machine Learning

Learning of the softmax model

- Learning of parameters \mathbf{w} : statistical view

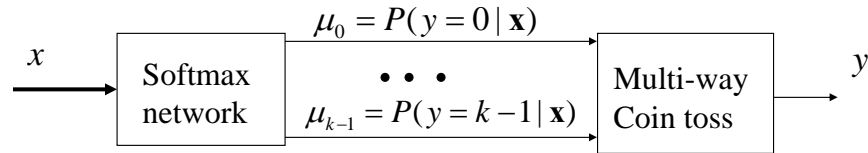

Assume outputs y are transformed as follows

$$y \in \{0 \ 1 \ \dots \ k-1\} \quad \longrightarrow \quad y \in \left\{ \begin{matrix} \begin{pmatrix} 1 \\ 0 \\ \dots \\ 0 \end{pmatrix} & \begin{pmatrix} 0 \\ 1 \\ \dots \\ 0 \end{pmatrix} & \dots & \begin{pmatrix} 0 \\ 0 \\ \dots \\ 1 \end{pmatrix} \end{matrix} \right\}$$

CS 2750 Machine Learning

Learning of the softmax model

- Learning of the parameters \mathbf{w} : statistical view

- **Likelihood of outputs**

$$L(D, \mathbf{w}) = p(\mathbf{Y} | \mathbf{X}, \mathbf{w}) = \prod_{i=1, \dots, n} p(y_i | \mathbf{x}_i, \mathbf{w})$$

- We want parameters \mathbf{w} that maximize the likelihood

- **Log-likelihood trick**

– Optimize log-likelihood of outputs instead:

$$\begin{aligned} l(D, \mathbf{w}) &= \log \prod_{i=1, \dots, n} p(y_i | \mathbf{x}_i, \mathbf{w}) = \sum_{i=1, \dots, n} \log p(y_i | \mathbf{x}_i, \mathbf{w}) \\ &= \sum_{i=1, \dots, n} \sum_{q=0}^{k-1} \log \mu_i^{y_{i,q}} = \sum_{i=1, \dots, n} \sum_{q=0}^{k-1} y_{i,q} \log \mu_{i,q} \end{aligned}$$

- **Objective to optimize**

$$J(D, \mathbf{w}) = - \sum_{i=1}^n \sum_{q=0}^{k-1} y_{i,q} \log \mu_{i,q}$$

CS 2750 Machine Learning

Learning of the softmax model

- **Error to optimize:**

$$J(D_i, \mathbf{w}) = -\sum_{i=1}^n \sum_{q=0}^{k-1} y_{i,q} \log \mu_{i,q}$$

- **Gradient**

$$\frac{\partial}{\partial w_{jq}} J(D_i, \mathbf{w}) = \sum_{i=1}^n -x_{i,j} (y_{i,q} - \mu_{i,q})$$

- The same very easy **gradient update** as used for the binary logistic regression


$$\mathbf{w}_q \leftarrow \mathbf{w}_q + \alpha \sum_{i=1}^n (y_{i,q} - \mu_{i,q}) \mathbf{x}_i$$

- But now we have to update the weights of k networks

CS 2750 Machine Learning

Multi-way classification


- **Yet another approach 3**

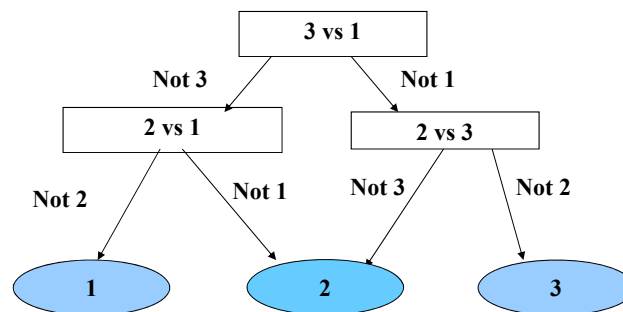

CS 2750 Machine Learning

Decision trees


- An alternative approach to classification:
 - Partition the input space to regions
 - Regress or classify independently in every region

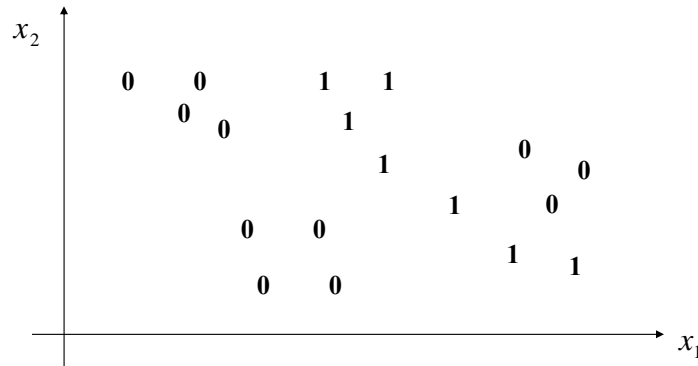

CS 2750 Machine Learning

Decision trees

- An alternative approach to classification:
 - Partition the input space to regions
 - Regress or classify independently in every region

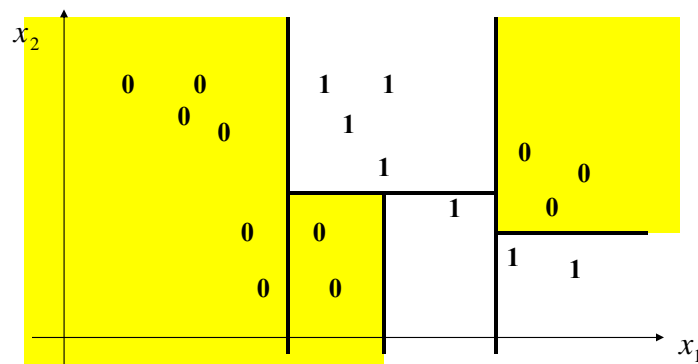

CS 2750 Machine Learning

Decision trees


- **Decision tree model:**

- Split the space recursively according to inputs in \mathbf{x}
- Classify at the bottom of the tree

Example:

Binary classification $\{0,1\}$

Binary attributes x_1, x_2, x_3

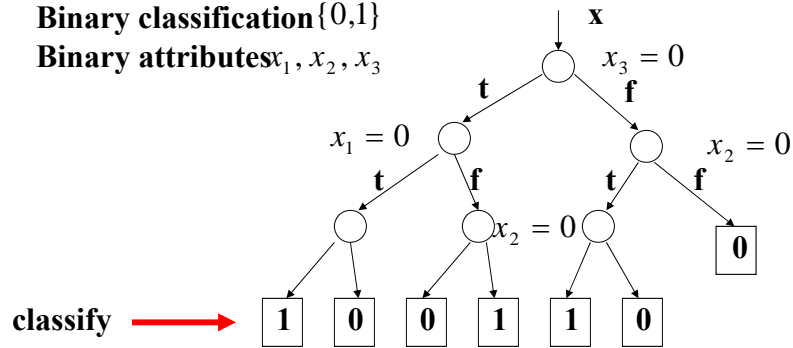

CS 2750 Machine Learning

Decision trees

- **Decision tree model:**


- Split the space recursively according to inputs in \mathbf{x}
- Classify at the bottom of the tree

Example:

Binary classification $\{0,1\}$

Binary attributes x_1, x_2, x_3

$\mathbf{x} = (x_1, x_2, x_3) = (1, 0, 0)$

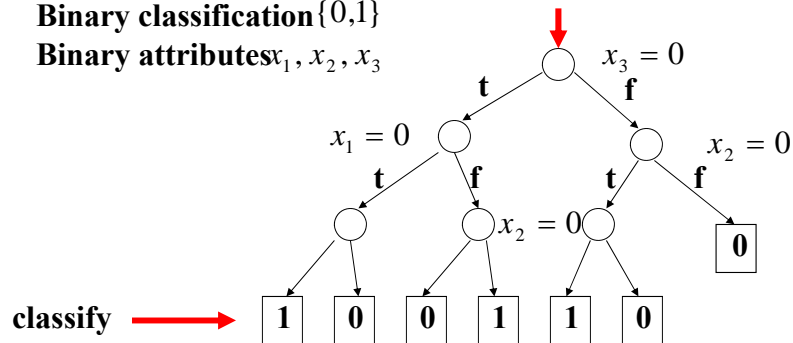

CS 2750 Machine Learning

Decision trees

- **Decision tree model:**


- Split the space recursively according to inputs in \mathbf{x}
- Classify at the bottom of the tree

Example:

Binary classification $\{0,1\}$

Binary attributes x_1, x_2, x_3

$\mathbf{x} = (x_1, x_2, x_3) = (1,0,0)$

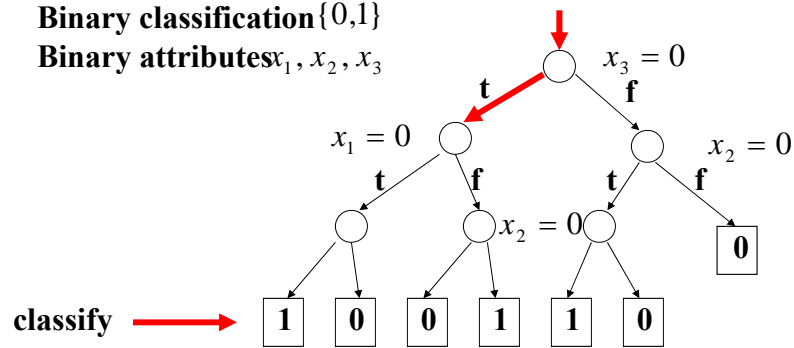

CS 2750 Machine Learning

Decision trees

- **Decision tree model:**


- Split the space recursively according to inputs in \mathbf{x}
- Classify at the bottom of the tree

Example:

Binary classification $\{0,1\}$

Binary attributes x_1, x_2, x_3

$\mathbf{x} = (x_1, x_2, x_3) = (1,0,0)$

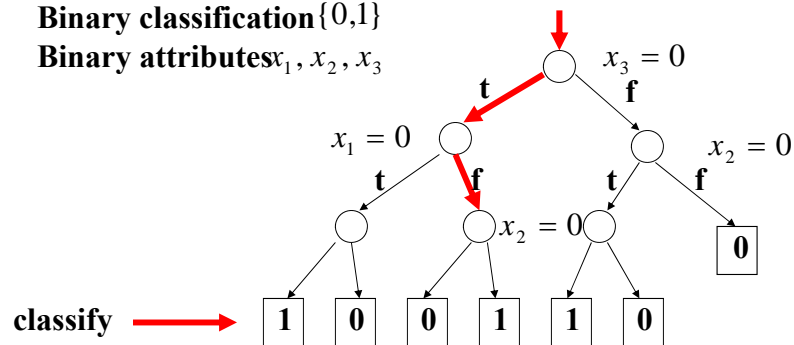

CS 2750 Machine Learning

Decision trees


- **Decision tree model:**

- Split the space recursively according to inputs in \mathbf{x}
- Classify at the bottom of the tree

Example:

Binary classification $\{0,1\}$

Binary attributes x_1, x_2, x_3

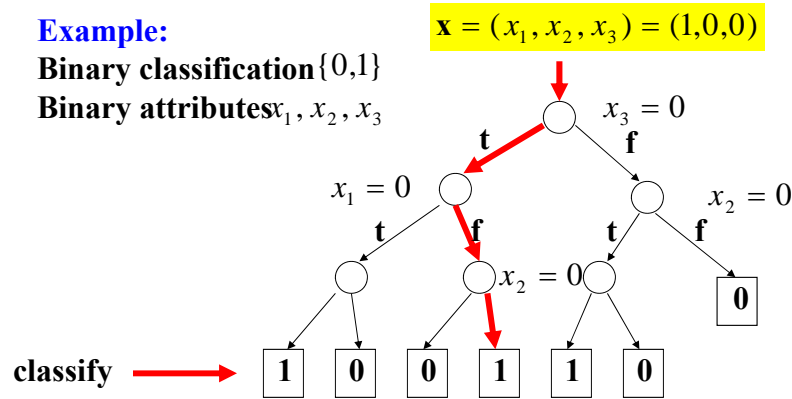


CS 2750 Machine Learning

Learning decision trees

How to construct /learn the decision tree?

- **Top-bottom algorithm:**

- Find the best split condition (quantified based on the impurity measure)
- Stops when no improvement possible



- **Impurity measure I:**

- measures how well are the two classes in the training data D separated $I(D)$
- Ideally we would like to separate all 0s and 1

- Splits: **finite or continuous value attributes**

Continuous value attributes conditions: $x_3 \leq 0.5$

CS 2750 Machine Learning

Impurity measure

Let $|D|$ - Total number of data entries in the training dataset

$|D_i|$ - Number of data entries classified as i

$$p_i = \frac{|D_i|}{|D|} \quad \text{- ratio of instances classified as } i$$

Impurity measure $I(D)$

- defines how well the classes are separated
- in general the impurity measure should satisfy:
 - Largest when data are split evenly for attribute values

$$p_i = \frac{1}{\text{number of classes}}$$

- Should be 0 when all data belong to the same class


CS 2750 Machine Learning

Impurity measures

- There are various impurity measures used in the literature
 - **Entropy based measure (Quinlan, C4.5)**

$$I(D) = \text{Entropy}(D) = -\sum_{i=1}^k p_i \log p_i$$

Example for k=2



- **Gini measure (Breiman, CART)**

$$I(D) = \text{Gini}(D) = 1 - \sum_{i=1}^k p_i^2$$


CS 2750 Machine Learning

Impurity measures

- **Gain due to split** – expected reduction in the impurity measure (entropy example)

$$Gain(D, A) = Entropy(D) - \sum_{v \in Values(A)} \frac{|D^v|}{|D|} Entropy(D^v)$$

$|D^v|$ - a partition of D with the value of attribute $A = v$

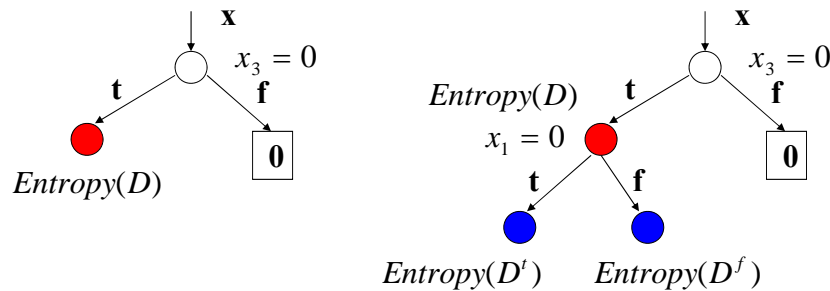

CS 2750 Machine Learning

Decision tree learning


- **Greedy learning algorithm:**
 - Repeat until no or small improvement in the purity
 - Find the attribute with the highest gain
 - Add the attribute to the tree and split the set accordingly
- Builds the tree in the top-down fashion
 - Gradually expands the leaves of the partially built tree
- The method is greedy
 - It looks at a single attribute and gain in each step
 - May fail when the combination of attributes is needed to improve the purity (parity functions)

CS 2750 Machine Learning

Decision tree learning

- **Limitations of greedy methods**

Cases in which a combination of two or more attributes improves the impurity

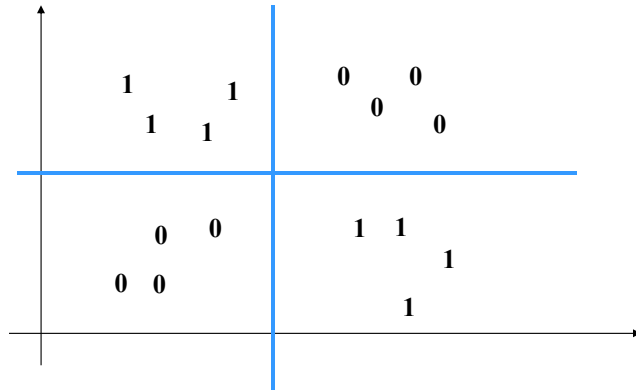

CS 2750 Machine Learning

Decision tree learning

By reducing the impurity measure we can grow **very large trees**

Problem: Overfitting

- We may split and classify very well the training set, but we may do worse in terms of the generalization error

Solutions to the overfitting problem:

- **Solution 1.**
 - Prune branches of the tree built in the first phase
 - Use validation set to test for the overfit
- **Solution 2.**
 - Test for the overfit in the tree building phase
 - Stop building the tree when performance on the validation set deteriorates

CS 2750 Machine Learning